





ACER

MADE IN ITALY

		230V				24V	
		AC4R DL	AC6R DL	AC8R DL	AC12R DL	AC3 RM DL	AC6 RM DL
Max weight wing	kg	400	600	800	1200	300	600
Motor supply	V	230V a.c.	230V a.c.	230V a.c.	230V a.c.	24V d.c.	24V d.c.
Power	W	250	280	300	350	150	150
Thrust	N	500	700	900	1200	300	500
Lubrifcation	Tipo	Grease	Grease	Oil	Oil	Grease	Grease
Thermal cut-out	°C	140	140	140	140	-	-
Working temperature	°C Min/Max	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70
Protection level	IP	44	44	44	44	44	44
Intermittence work cycle	%	35	35	35	35	80	80
Speed	m/min	10	10	8	8	6/12	11
Height pinion (h)	mm	99	99	95	95	95	95

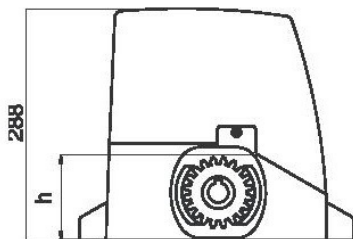

SETUP ACER DL 230V

230V complete 50Hz Setup for single-wing sliding gates automation.



FIDO2



FIDO 2



VISIO



SPL



SKANX



RG1R DL



TL

SETUP AC6RM DL

600 Kg

AC6RM

Magnetic