


		230V					24V		
		OP3 UNI	OP3 UNI L	OP3 SL UNI	OP5 UNI	OP5 UNI L	OP2 24 UNI	OP3 24 UNI	OP5 24 UNI
Max weight wing	kg	800	800	350	900	900	250	500	700
Max lenght wing	m	3	3	3	5	5	2,30	3	5
Motor supply	V	230V a.c.	230V a.c.	230V a.c.	230V a.c.	230V a.c.	24V d.c.	24V d.c.	24V d.c.
Power supply	W	210	220	160	220	220	60	80	80
Power	N	2000	2000	1800	2000	2000	1500	1800	1800
Torque	mm	315	315	360	465	465	350	315	465
Working temperature	°C Min/Max	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70	-20 +70
Protection level	IP	54	54	54	54	54	54	54	54
Intermittence work cycle	%	35	30	35	35	30	80	80	80
Time for 90° cycle	s	19	30	19	28	45	15	19	28



SETUP OPTIMO OP2 24 UNI DL

24V complete Setup for swing gate automation for leaf until 2,30 mt.

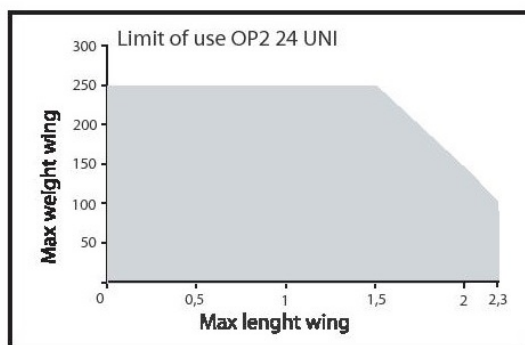

FIDO2



FIDO 2



VISIO



SPL 24



SKANX



GE UNI24 R DL



TL